


Specifications Cordstrap AnchorLash® 105.3 SH

Performance Specifications	
Solution Breaking Strength*	9.000 daN / 19,800 lbf (±10%)
Solution MSL Certification	6.750 daN / 14,850 lbf (±10%) Mariterm, Eurosafe, DNV-GL witnessed

Specifications Cordstrap AnchorLash 105.3 SH	
Construction & Dimensions	Three horizontal woven lashings joined by 3 buckles. Each lashing has a snap hook for fast and easy connection to the container anchor point.
Designed for	Rigid packaging, Soft packaging, Drums, IBC's, FIBC's (big bags)
Horizontal Element Woven Lashing	4.5 meter / 14.8' (±2%) – 2 pieces 5.5 meter / 18' (±2%) – 2 pieces 7.5 meter / 24.6' (±2%) – 2 pieces
- Length (red)	32 mm / 1.25" (±5%)
- Length (orange)	≤ 9%
- Length (white)	
- Width	
- Elasticity	
Heavy duty buckle	35 mm / 1,4" (±5%)
- Width	
Snaphook	95 mm / 3.8" (±5%) 56 mm / 2.24" (±5%) 8.5 mm / 0.34" (±5%)
- Length	
- Width	
- Radius	
Packaging	
Pieces per Box	PalletBox 100
Box Weight	365 kg / 805 lbs
Box Dimensions	1200 x 800 x 776 mm
Item number	7256945
Packaging	
Pieces per Box	SmallBox 7
Box Weight	24 kg / 53 lbs
Box Dimensions	400 x 400 x 250 mm
Item number	7256940
Material	
Lashing	High tenacity polyester filament yarn
Buckle	Silver zinc coated dropforged steel buckle
Hook	Galvanized steel snap-hook
Packaging	The solution is packed in a plastic bag (recycling 4) and corrugated fiberboard (recycling code 20)





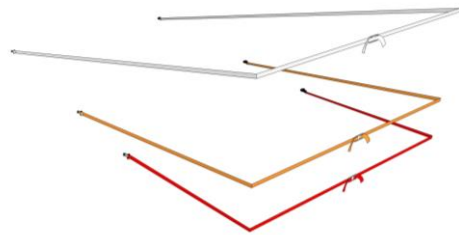











Represented in over 50 countries
World market leader
ISO 9001 certified
Manufacturer & supplier since 1965
Offering genuine customer solutions

Specialist advice
Continued product development
Training at Cordstrap Training Centers
Quality assurance

Recommended Tensioner(s)		
Battery Tensioner CBT 35 Product Code EU Type (incl. charger, 2 batteries) 7850001 Product Code US Type (incl. charger, 2 batteries) 7580021 Product Code Global Type (incl. 2 batteries) 7580031 Product Code Global Type (incl. charger) 7580051	Pneumatic Tensioner CT 35 PN Product code 7567000	Manual Tensioner CT 40 (2) Product code 7502400

Recommended Accessories		
Container Magnets Packaging 2 pieces per box Product Code 7555000	Applicator Tool Packaging 1 piece per box Product Code 7608200	Cargo protection Vertical hang Strap Retainer buckles Reefer lashing point *see more information in Add-Ons Commercial spec. sheet to find products for supporting your application

Links to instruction sheet						
						
Steel drums	Plastic drums	IBC's	Soft packaging	Small big bags	High big bags	Crates/boxes
						

We recommend storing all Cordstrap Products in a cool and dry environment out of direct sunlight and between -5°C and 40°C / 23°F and 104°F.
 All information provided is based on accuracy at time of creation.



Represented in over 50 countries
 World market leader
 ISO 9001 certified
 Manufacturer & supplier since 1965
 Offering genuine customer solutions

Specialist advice
 Continued product development
 Training at Cordstrap Training Centers
 Quality assurance