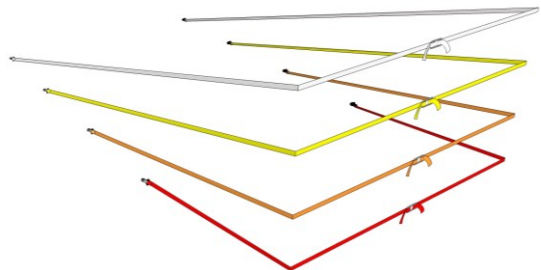## Specifications Cordstrap AnchorLash® 105.4 SH

Performance Specifications	
Solution Breaking Strength*	12.000 daN / 26,400 lbf (±10%)
Solution MSL	9.000 daN / 19,800 lbf (±10%)
Certification	Mariterm, Eurosafe, DNV-GL witnessed

Specifications Cordstrap AnchorLash 105.4 SH	
Construction & Dimensions	Four horizontal woven lashings joined by 4 buckles. Each lashing has a snap hook for fast and easy connection to the container anchor point.
Designed for	Rigid packaging, Soft packaging, Drums, IBC´s, FIBC´s (big bags)
Horizontal Element Woven Lashing	
- Length (red)	4.5 meter / 14.8' (±2%) – 2 pieces
- Length (orange)	5.5 meter / 18' (±2%) – 2 pieces
- Length (yellow)	6.5 meter / 21.3' (±2%) – 2 pieces
- Length (white)	7.5 meter / 24.6' (±2%) – 2 pieces
- Width	32 mm / 1.25" (±5%)
- Elasticity	≤ 9%
Heavy duty buckle	
- Width	35 mm / 1.4" (±5%)
Snaphook	
- Length	95 mm / 3.8" (±5%)
- Width	56 mm / 2.24" (±5%)
- Radius	8.5 mm / 0.34" (±5%)

Packaging	PalletBox	SmallBox
Pieces per Box	95	6
Box Weight	471 kg / 1 038 lbs	30 kg / 66 lbs
Box Dimensions	1200 x 800 x 776 mm	400 x 400 x 250 mm
Item number	7256925	7256920

Material	High tenacity polyester filament yarn
Lashing	Silver zinc coated dropforged steel buckle
Buckle	Galvanized steel snap-hook
Hook	The solution is packed in a plastic bag (recycling 4) and corrugated
Packaging	fiberboard (recycling code 20)

Recommended Tensioner(s)

Battery Tensioner CBT 35	Pneumatic Tensioner CT 35 PN	Manual Tensioner CT 40 (2)
Product Code EU Type (incl. charger, 2 batteries) 7850001	Product code 7567000	Product code 7502400
Product Code US Type (incl. charger, 2 batteries) 7580021		
Product Code Global Type (incl. 2 batteries) 7580031		
Product Code Global Type (incl. charger) 7580051		

Recommended Accessories

Container Magnets	Applicator Tool	Cargo protection
Packaging	Packaging	Vertical hang Strap
2 pieces per box	1 piece per box	Retainer buckles
		Reefer lashing point
Product Code	Product Code	*see more information in Add-Ons
7555000	7608200	Commercial spec. sheet to find products for supporting your application

Links to instruction sheet

Steel drums	Plastic drums	IBC´s	Soft packaging	Small big bags	High big bags	Crates/boxes

We recommend storing all Cordstrap Products in a cool and dry environment out of direct sunlight and between -5°C and 40°C / 23°f and 104°f.

cordstrap

V4

Represented in over 50 countries

World market leader
ISO 9001 certified
Manufacturer & supplier since 1965
Offering genuine customer solutions

Specialist advice
Continued product development
Training at Cordstrap Training Centers
Quality assurance